
Waldmann

LIGHT FOR BETTER RESULTS

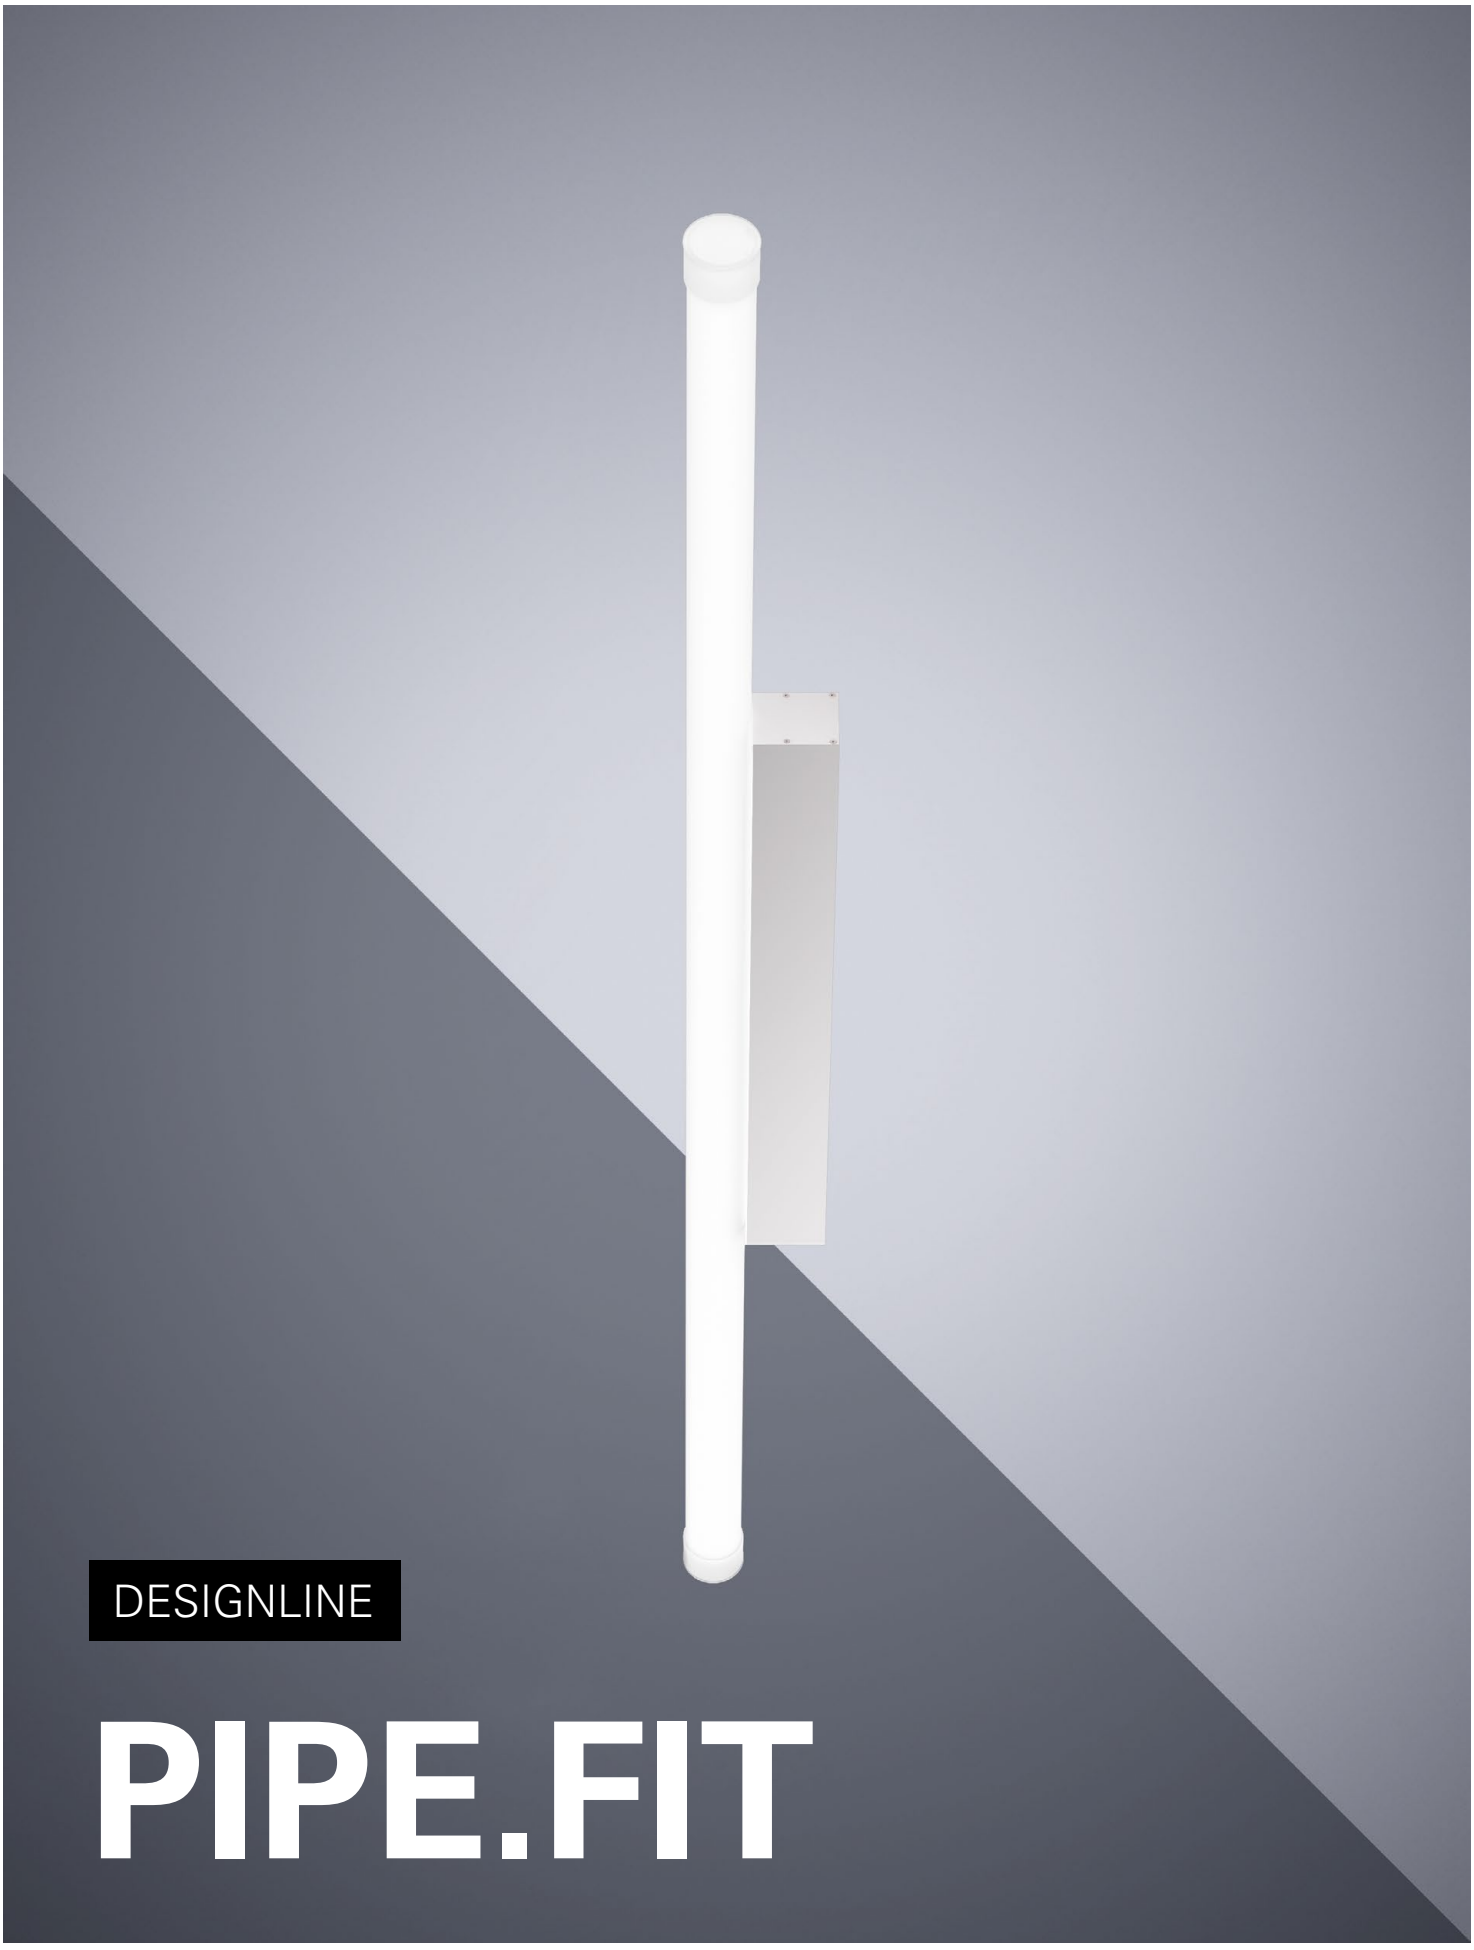

DESIGNLINE

PIPE.FIT

PIPE – BRINGS SPACES TO LIFE

PIPE combines design and impact.

Whether installed horizontally or vertically, it adapts flexibly to the space and sets targeted accents.


Colours and materials are showcased more effectively, and the environment appears harmonious and of high quality.

A solution that looks good and enhances your spaces.







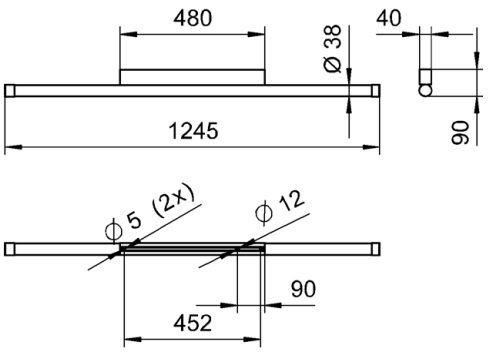

Light source	LED
Work equipment	Power supply unit
Connected load	220 – 240V; AC; 50 Hz; 60 Hz
Luminous efficiency*	approx. 116 lm/W
Color rendering index	Ra ≥ 90; R9 ≥ 50
Light distribution	Uniform; approx. 68 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Diffusor
System of protection/Class*	IP 20; 05; I
Technology	Continuously dimmable; DALI; Touch DIM
Operation	External
Housing	Acrylic (PMMA), white gloss
Light source cover	Acrylic (PMMA); white opal
Mains lead	Connector; 3 pin; Single Luminaire
Design	mounted version
Fastening	Wall bracket
Ambient temperature min./max	25 °C; 25 °C
DALI control	BR | Broadcast
EAN	4013330171711
Weight without/incl. packaging	1,4; approx. 0 kg
Special features	Integration into DALI light management systems

* For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.

Colour temperatur	Power consumption	Luminous flux	Model	Order No.
warm white 3.000 K	27 W	3.150 lm	PIA 3200/930/D	00814210
neutral white 4.000 K	27 W	3.150 lm	PIA 3200/940/D	00814211



www.waldmann.com

© 05.03.2026 H.Waldmann GmbH & Co. KG

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.